

---

# Теоритическое исследование обработки междурядий хлопчатника с фрезерными рабочими органами при посеве пшеницы



Мавлонов Ф.



Рахимов Х.

**Мавлонов Фахраддин Хакимович**

Teacher of the department of «System transport» of UrSU.  
Преподаватель кафедры «Транспортные системы» УрГУ.  
Ургенч, Узбекистан

**Рахимов Хурсанд Мадрахим угли**

Student of the specialty "Upper Earth Transportation " of UrSU.  
Студент специальности "Надземные транспортные системы" УрГУ.  
Ургенч, Узбекистан

---

rows of cotton plant has been carried out in September and October due to the provision of the need of the population for seed production and using the fields with sensibility mostly grain is being planted in the arcs tendered once or twice treated for an go centimeter interval of the rows with cultivator fertilizer when the rows intervals are go as well treated for a interval of the rows with cultivator fertilizer when the rows intervals are . Treating depth is in it, at first flattening organs of the planted grain are placed into the cultivators. It is necessary to get provision of the distribution on the surface of the fields of the particular flattening plating depth according to the agro-technical terms in scientific technical organizing replanting.

Without this method above, the surface of the field. Should be lumpy we ve mentioned about the technology of planting into the cotton plant rows in literature [1].

Namely spreading grain in once or twice treated row intervals with cultivator fertilizers and burying them with working organs. Although all agro technical terms are taken into consideration, can't be grown and seed in the fields can't be smoothly distributed. That's why using this type of crop dusted and well-chosen seed with sensibility leads to the great economical effectiveness (in Khoreesm (Uzb)) annually if the grain is planted in the cotton plants in , if of seed are economize in each acre it will be grain.

In most cases autumn seasonal wheat is planted into cotton rows by cultivating the field, not watering. It might cause occurring different seized lumps over the surface of the field. As a result seed of wheat may fall down under lumps and lose their growing ability smoothly distribution over the field. In its own turn later it may reduce working quality in planting process.

If wheat is planted by using (sunshine) large lumps and weed grass in the fields can damage to the ("soshniks" planting equality).

First of all to plant wheat into cotton rows the area must be prepared according to the agrotechnie demands [2].

Namely the seer face of the sand layer must be 0-10 cm, separated structural in depth, numbers should be [3], macsimum measurement of lump shouldn't be more that [4]. For that due to the flattening the sand in the rows, threshing from weed grass, at first, it is treated with cultivators in . In spite of Being-trcated twice the sand on the surface of the field mostly couldn't provide the demands above. The reason is here not being supplied enough wetness before being treated in the cotton rows , namely watering can't be made for some reason (eg? Hardest process, lack of water or etc). As a result the sand dries up, its surface gets more lumpy after being treated. And it radically reduces the quality and chances of planting wheat.

For this purpose in this article theoretical teating with foresail working organ with the help of cultivator due to making normal conditions in the first treating into the cotton rows.

Working organs of frees are cooled active working organs when they are made to be circled from the power of the tractor. Freezes are divided into forest, jungles field, garden and plant rows cutting down sorts according to their functions. Tiled frizz are used for getting prepared the fields areas to plant in spring by mincing lumps. Chopping frezs are used in the cotton rows threshing the earth from weed grass and softening it as well.

Circling point of the frees in agriculture is vertically and horizontally.

In most cases working organs of the freezes go around horizontally to their movement directions. They consist of knives in the shape of raround the discus circulation . The collection of these types of discs forms freesias drum. The number of the knives are mostly taken according to their functions. The shape and measurement of the knives depend on the functions conditions of the

freeze. The knife may turn round from up to down from down to up, namely the opposite side of the car. While turning round to the straight power may occur, which tries the car to move straight, on the opposite turning round, the energy is demanded more.

That's why turning round to the straight is demanded in all field freezes opposite turning is used in stone zones and the forests. The knife can be jointed with the discs bikr, prujinali, sharnirlr. In the field freezes they are fixed fixing is used in stone areas, fixing can be demanded in speedy freezes digging turf [5].

Freeze drums go round horizontally and participate in 2 movements round its point out a speed of (relative movement) and with car at a speed of moving movement. Each lump of the sand in the disc, its form and measure depend on rounding side of the drum and the form of moving traces of the knife established one by one vertically in the disc sand. In treating tods to the sand it is given in literatures the freeze drums radius is determined dependently on the thickness of the layer [5].

Here: -treating depth ( ), if it is , then and  $R=15$  cm.

One periling out distance of a cycling freeze knife  $X_z$  (figure 1) is considered the main factor determining the shape of the lumps occurring in the sand. It is chosen according to the fields conditions or counted by the following formula [5].

$$X_z = \frac{2\pi V_m}{z\omega} = \frac{2\pi R}{\lambda z} \quad (2)$$

- the numbers of the knives in the drum.
- kinematic regime. Its clarified with the speed of freeze.

(in the sand freeze is accepted).

It's known from the formula 2 knives periling distance can be reduced by rising and numbers of the freeze knives.


The formula 2 can be the following, if kinematic regime is identified

$$\lambda = \frac{2\pi R}{X_z z} \quad (4)$$


If are accounted (the numbers of the knives ) and lumps measurement in maximum is , then it is and it is accepted basing on .

Given accounts of and their interdependence shown in , the shape of the lump and on the basis of the may rise radically, if the shape of the lump is after having been treated, either reducing the speed of the tractor or rising cycling speed of the freeze drums can solve this matter.

It can be clear from all above the cycling speed of the drum must be more at least degrees than the aggregate's forwarding speed. In this case the shape of the lumps on the surface of fields can be satisfactory for the terms of the agro techniques at minimum degree ( ).

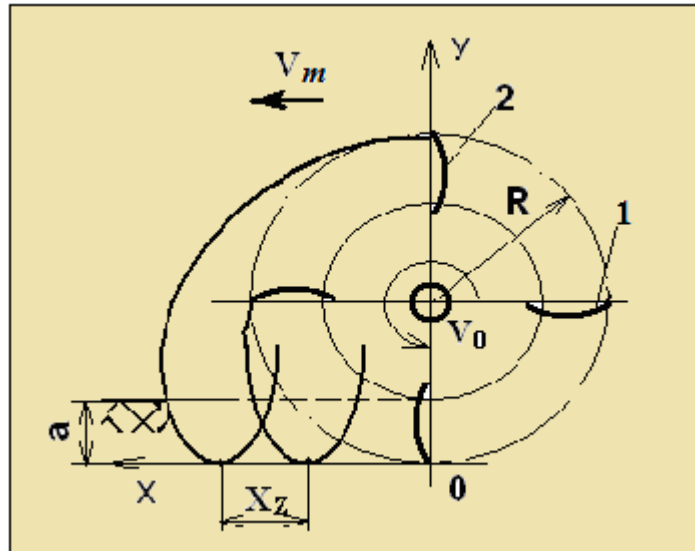

Movement trace of the working organs of the freeze. –freeze knives, –the sand thickness, –the radius of the freeze drum.

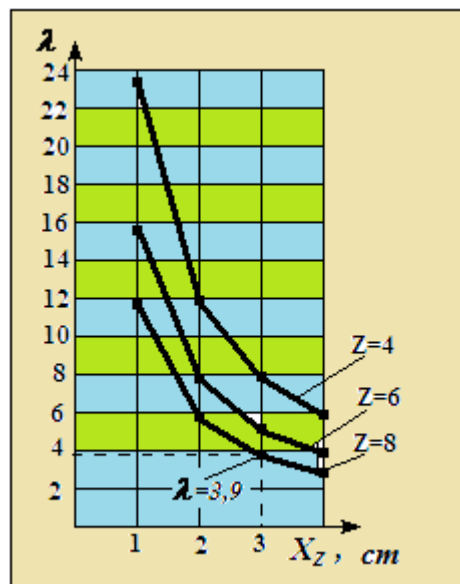

the graphics of choosing , the level of the kinematic remise. – numbers of the knives.

We determine the speed of treating sand preparing rows for planting grain, if it is

All in all the condition of the and for the other amounts in figure is identified, necessary parameter of distributing movement to the ferial drum according to the conditions of the cotton fields.

In the next steps of the research fixing ferial drums into the back sections can be theoretically investigated. In those the width and weight of the ferial drum based on cotton rows intervals can be geometrically and the other work my be done.

### Used Literature

1. I. Ro'zmetov, F. Mavlanov. Xorazm environment cotton line's interval autumn wheat souring condition. Urganch, UrSU, "Ilm sarchashmalari" magazine. №-3, 2008-y, p-4.
2. I. Ro'zmetov, F. Mavlanov. "Projected sowing apparatus with cotton line's interval the reason of

---

sowing wheat". Toshkent, TashSTU, "ToshDTU Xabarlari" 1-2- n, 2011-y, p-4.

3. [www.Agrosp.kiev.ua](http://www.Agrosp.kiev.ua). Технология выращивания пшеницы озимой. 2014 г.

4. I.Qobulov. "The technology of rearing autumn grain crops. Andijon, " Xayot nashiryoti", 2014-y, p-82.

5. A.Hamidov. "Planning agriculture machine". Toshkent, "O'qituvchi", 1991-y, p-248.